



MeoDot DFX Micro1


Compact reflex sight designed for pistol. Also can be used as back up optical sight (BUOS) for rifles fitted with main riflescope with high magnification like sniper rifles (SR) or designated marksman rifles (DMR) on the top of the front mounts ring or angled picatinny rail. It's very thin frame allows the operator to have a good overview with both eyes open of a target zone blocking very limited part of field of view. Also can be mount as optical sight for shot gun.

Magnification	1x	
Objective Diameter (mm)	24x17	
Dot Brightness* (cd/m ²)	65 000	
Vertical range (MOA)	100	
Rectification - Vertical step (MOA)	35/360°	
Horizontal range (MOA)	100	
Rectification - Horizontal step (MOA)	35/360°	
Recoil Resistance (g)	800	
Dot Size/color (MOA)	≤3/Red	
Dot Illumination Levels (Day/Night)	Continuous	
Manual Intesity Mode (Y/N)	Y	
Power Supply (Type/V)	3 (1xCR 1632)	
Battery Lifetime** (hrs)	30 000	
Motion sensor (Y/N/g)	Y/0.1	
Automatic Shut Down (Y/N/hrs)	Y/14	
Operational Temperature Range (°C)	-25	+60
Storage Temperature Range (°C)	-35	+71
Moisture Resistance [+23/+40°C] (%)	92	
Water Resistance (m/hrs)	1/0.5	
Dimensions L x H x W*** (mm)	47 x 49 x 28	
Weight**** (g)	60	

FEATURES

- ➔ **WATERPROOF**
- ➔ **SHOCKPROOF**
- ➔ **MEOBRIGHT**
- ➔ **MEODROP**

- * max. intensity level day, ambient temperature +20°C
- ** 1pc - 3 V, size CR 1632, 140 mAh and ambient temperature +20°C, 2nd day level of intensity
- *** With mount
- **** With mount and battery

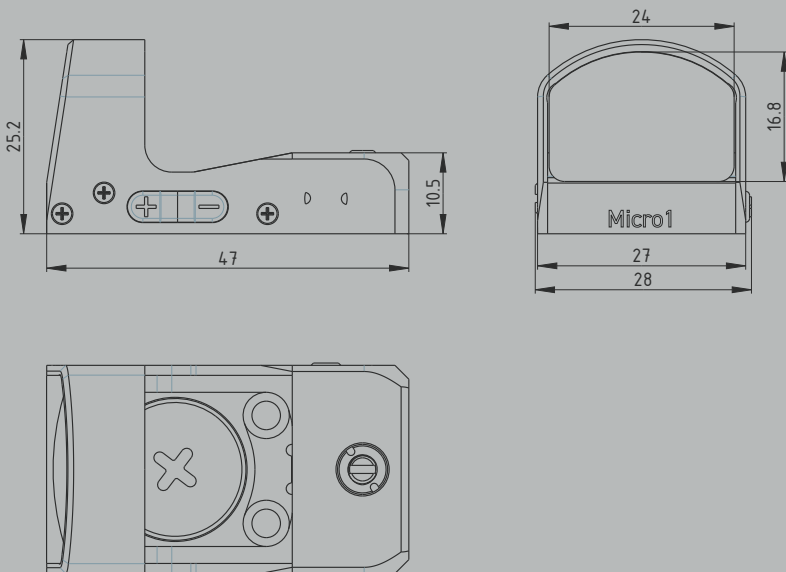

MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přeřov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com





MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Píerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com