



MeoBoost DF 3

The magnifying module with flip mount is ideal solution for weapon systems with red dot sights (AR, SMG, LMG). Allows precise aiming at medium distances and after unfolding also the possibility of direct shooting at short distances (CQB). It can be used also as a monocular spotting system with three times magnification. Magnifier is equipped with rectifiers to set the aiming point to the central position.




Magnification	3x	
Objective Lens Diameter (mm)	20	
Exit Pupil Diameter (mm)	6.4	
Eye Relief (mm)	65	
Field of View (°)	min. 6	
Dioptric Correction (D)	-4	4
Focus Range (m)	20	∞
Measured Integral Transmission Daylight (%)	87	
Measured Integral Transmission Twilight (%)	83	
Vertical range (MOA)	80	
Horizontal range (MOA)	80	
Rectification step	continuous	
Recoil Resistance (g)	500	
Operational Temperature Range (°C)	-40	+60
Storage Temperature Range (°C)	-45	+71
Moisture Resistance [+23/+40°C] (%)	80/98	
Water Resistance (m/hrs)	2/2	
Dimensions* L x H x W (mm)	130x46x49	
Weight** (g)	386	

FEATURES

- **MEOBRIGHT**
- **MEODROP**
- **SHOCKPROOF**
- **WATERPROOF**
- **NITROGEN PURGED**

* With eyepiece extended to max. position

** With flip mount and weapon system base

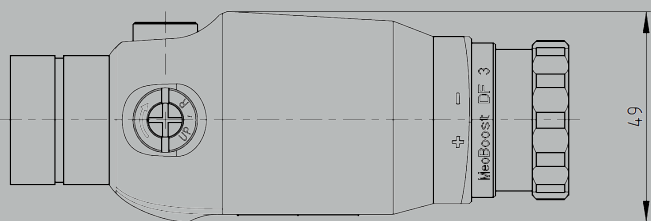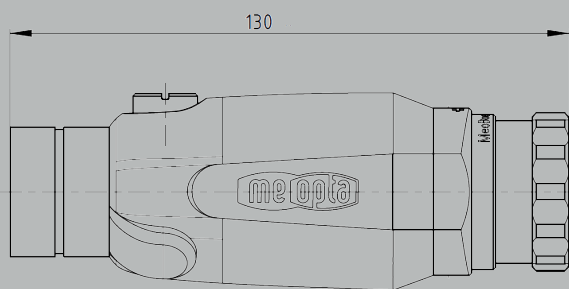

MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com





MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com