



# MeoGuard DF 8x32

MeoGuard DF binoculars combine superior optical elements in a compact, mechanically robust and ergonomically designed body. 8x32 can be an appropriate aid for observing, whether in an open space or on rugged terrain. The binocular combines outstanding optical properties that ensure a clear image. MeoGuard DF 8x32 is exceptionally resistant to moisture, dust, temperature fluctuation and shocks.

Magnification	8x	
Objective Lens Diameter (mm)	32	
Exit Pupil Diameter (mm)	4	
Eye Relief (mm)	15.5	
Reticle (Y/N)	N	
Field Of View (°)	7.9	
Field Of View (m/1000m)	139	
Dioptric Correction (D)	-3	+3
Minimum Focus Distance (m)	1.7	
Measured Integral Transmission Daylight (%)	min. 87	
Measured Integral Transmission Twilight (%)	min. 83	
Twilight Factor	16	
Interpupillary Distance (mm)	58 - 76	
Recoil Resistance (g)	100	
Operational Temperature Range (°C)	-40	+60
Storage Temperature Range (°C)	-45	+70
Moisture Resistance [+23/+40°C] (%)	80/95	
Water Resistance (m/hrs)	1/2	
Dimensions* L x H x W (mm)	139x50x126	
Weight** (g)	660	

## FEATURES

- **MEOBRIGHT**
- **MEODROP**
- **WATERPROOF**
- **FOGPROOF**
- **SHOCK RESISTANCE**
- **NITROGEN PURGED**

\* With covers, eyepiece extended max. poss., max. interpupillary dist.


\*\* With covers



**MEOPTA SYSTEMS s.r.o.**  
Kabelíkova 1, 750 02 Přerov  
Česká republika

Telefon: +420 581 241 111  
E-mail: meopta@meopta.com  
www.meopta.com



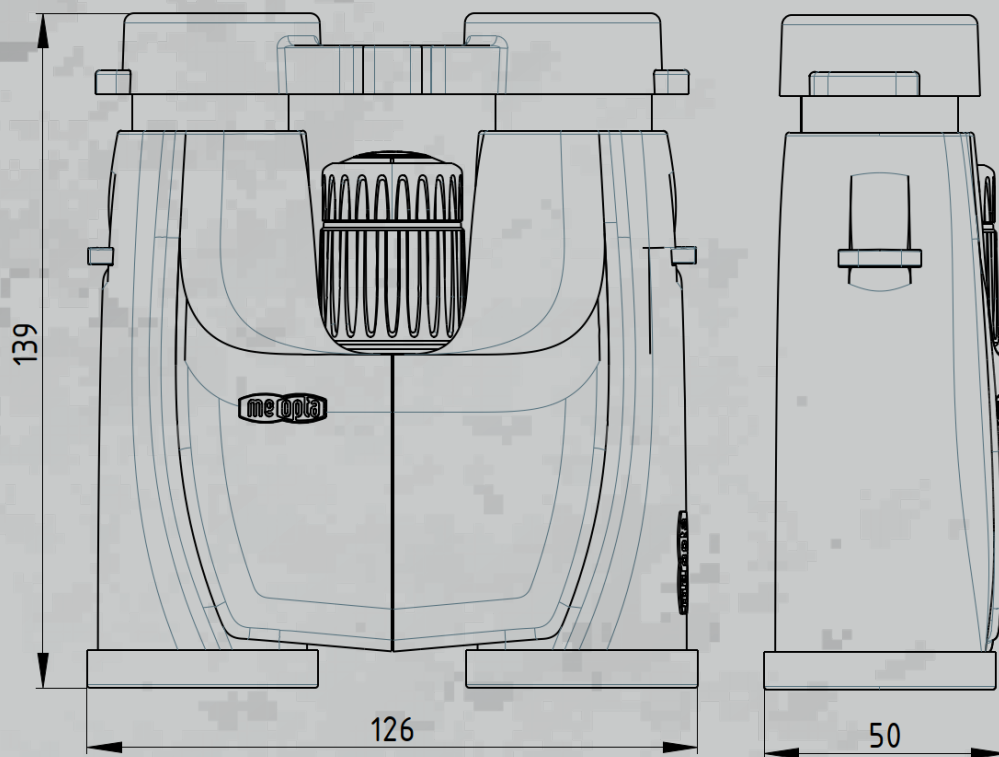

**MEOPTA SYSTEMS s.r.o.**  
Kabelíkova 1, 750 02 Přerov  
Česká republika

Telefon: +420 581 241 111  
E-mail: [meopta@meopta.com](mailto:meopta@meopta.com)  
[www.meopta.com](http://www.meopta.com)