



MeoGuard DF 10x42 HD

MeoGuard DF binoculars combine superior optical elements in a compact, mechanically robust and ergonomically designed body. 10x42 HD can be an appropriate aid for observing, whether in an open space or on rugged terrain. The binocular combines outstanding optical properties that ensure a clear image. MeoGuard DF 10x42 HD is exceptionally resistant to moisture, dust, temperature fluctuation and shocks.

Magnification	10x	
Objective Lens Diameter (mm)	42	
Exit Pupil Diameter (mm)	4.2	
Eye Relief (mm)	15	
Reticle (Y/N)	N	
Field Of View (°)	6.3	
Field Of View (m/1000m)	110	
Dioptric Correction (D)	-3	+3
Minimum Focus Distance (m)	3	
Measured Integral Transmission Daylight (%)	min. 88	
Measured Integral Transmission Twilight (%)	min. 84	
Twilight Factor	20.5	
Interpupillary Distance (mm)	59 - 74	
Recoil Resistance (g)	100	
Operational Temperature Range (°C)	-40	+60
Storage Temperature Range (°C)	-45	+70
Moisture Resistance [+23/+40°C] (%)	80/95	
Water Resistance (m/hrs)	1/2	
Dimensions* L x H x W (mm)	155x60x140	
Weight** (g)	950	

FEATURES

- **MEOBRIGHT**
- **MEODROP**
- **WATERPROOF**
- **FOGPROOF**
- **SHOCK RESISTANCE**
- **NITROGEN PURGED**

* With covers, eyepiece extended max. poss., max. interpupillary dist.


** With covers



MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com



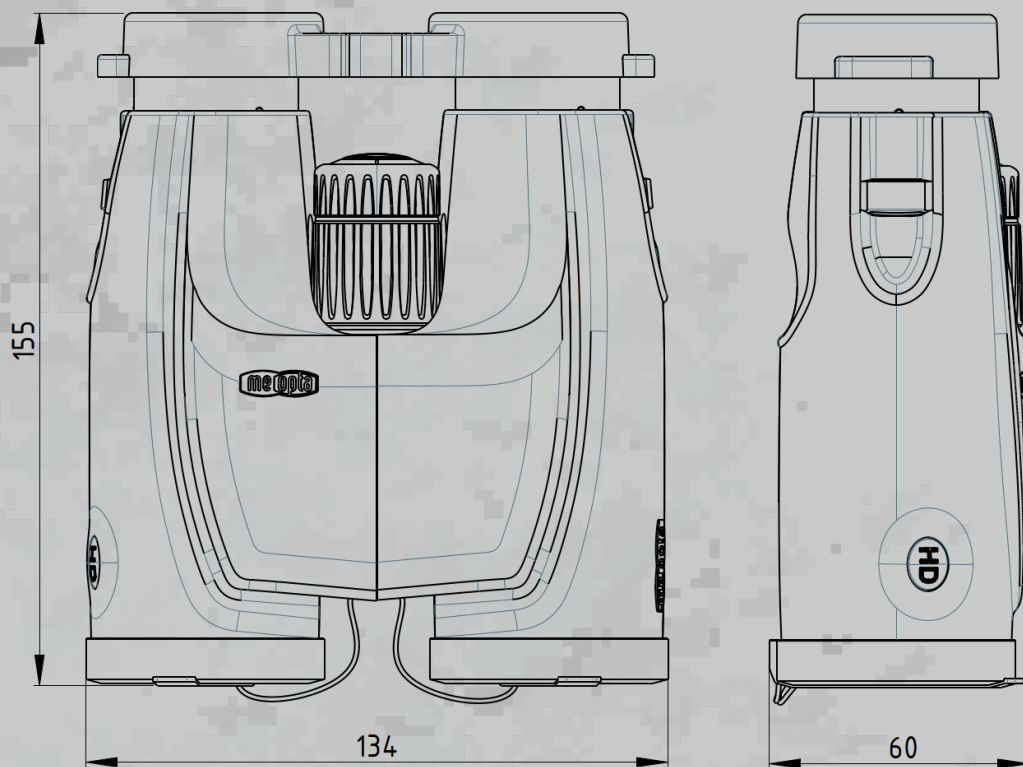

MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com